




# ROOF BOX WIND 32, WIND 43

50502 WIND 32 BLACK, 50500 WIND 32 GREY, 50501 WIND32 SILVER  
50508 WIND 43 BLACK, 50506 WIND 43 GREY, 50507 WIND 43 SILVER



## ASSEMBLY PARTS

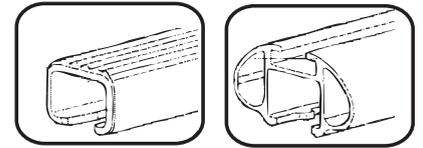

The box can be mounted on rectangular and T-shaped racks.

## BOX ASSEMBLY

1. Remove the box from the cardboard. All mounting parts are located in the bag placed at the base of the box.
2. Position the bottom of the box on a flat surface and place the cover on top of the box.
3. Prepare the hinge pins. Use the pins to connect the lid hinges with the base of the box in three spots (fig. 1). Note the correct push pins.



Fig. 1

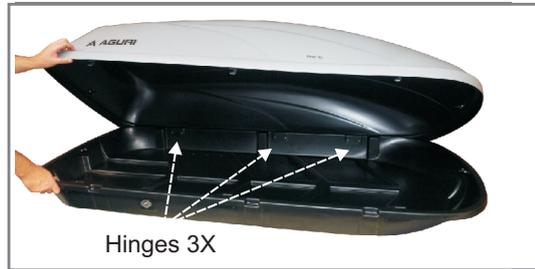


Fig. 2

4. Extend the arms of the actuator. Press the orange actuator latch lock and place the hook on the spindle in the base. Release the orange lock. Connect the second end of the actuator to the base of the box in the same way (fig 3). Repeat this with the second actuator. The actuators should connect the base of the box with the cover (fig. 4).



Fig.3



Fig. 4

## CAR ASSEMBLY

1. If you have a black or silver metallic box remove the protective foil.
2. Put the box on the car roof. Make sure you align the box correctly (Fig. 5). The base of the box contains 4 holes (Fig. 6). Place the box so that the beam is located between two of them. Given the length of the box and the roof of the car, choose which hole to use when connecting the beam. This applies to both beams. Remember that the box should not protrude beyond the roof of the car.
3. Install the mounting brackets starting with the bottom of the base, putting the brackets around the beam and placing the ends inside the holes at the base of the box (Fig. 7). Apply pressure and tighten the knob to fix the bracket (Fig. 8). Repeat these steps for all 4 mounting points (Fig. 9).
4. Insert the baggage strap in the oblong hole inside the fixing clamp (Fig. 10) in order to prevent the luggage from shifting while driving. Remember the correctly align the load inside the box (Fig. 14). Tighten the lid and lock the box (Fig. 11 - 13).

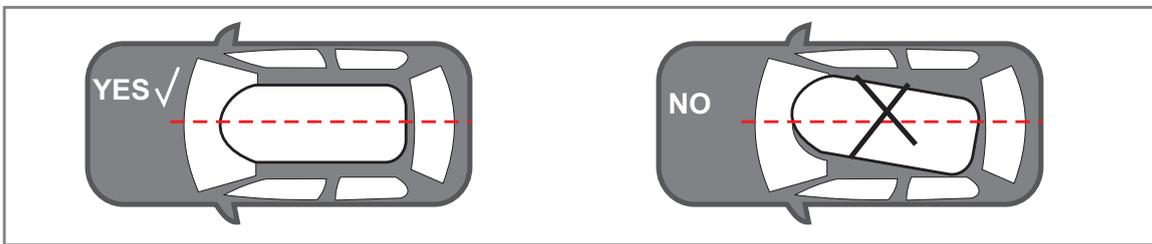


Fig.5



Fig.6

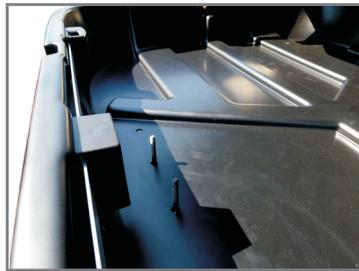


Fig.7



Fig.8



Fig.9



Fig.10



Fig.11



Fig.12



Fig.13

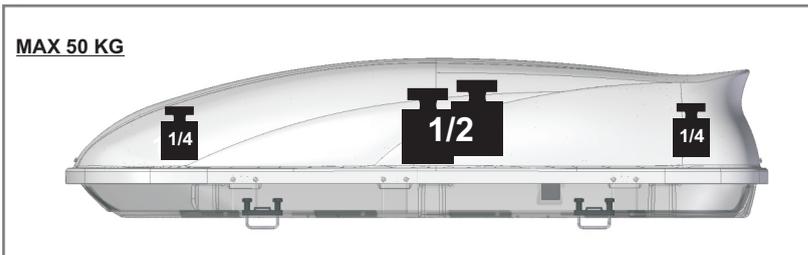


Fig.14

**!** The roof box should not protrude from the boundaries of the vehicle's roof.

**!** Roof box with a glossy finish maintenance wet cloth use only, dry cloth never can be used in the first place

#### Usage information:

- 1 After every installation of the box, make sure that all connections are tightened correctly.
- 2 When mounting the box follow the enclosed instructions.
- 3 The roof box and other accessories can be used only on a properly fitted roof rack.
- 4 Do not modify the mounting kits.
- 5 Do not overload the box and the rack exceeding the vehicle manufacturer's recommendations.
- 6 The box has a maximum weight capacity of 50 kg.
- 7 The load must be correctly distributed inside the box - Fig. 14.
- 8 Remember that the roof box increases the vehicle's height.
- 9 Make sure that the load is properly secured and that the roof box is locked.
- 10 When using an automatic car-wash facility, the roof box and roof bars must first be removed.
- 11 The roof box may prevent you from opening the car's sunroof.
- 12 Remember about the proper distribution of the load inside the roof box.
- 13 When not in use, the roof box should be removed.
- 14 Keep the roof box clean and be sure to properly lubricate the box's locks and hinges.
- 15 The speed driven must be suited to the load to be transported. Remember that the load inside the roof box may affect driving conditions, especially during cornering, braking, and acceleration.
- 16 After mounting the box and travelling for several kilometers, check that the roof box is firmly fixed to the roof bars. Repeat this after 50 km.
17. Note: Maintenance method: Dry cloth usage for roof box with glossy metallic finish may lead to permanent surface damage. Please use wet cloth with detergent in the first place, then dry the box surface afterward.

SAFETY  
CERTIFICATE



www.aguri.eu

#### ADDITIONAL FIXING OPTION-T-SHAPED BARSASSEMBLY SET 50 582 SOLD SEPARATELY

